
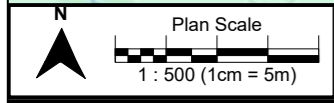


# Puck's Castle Ln, Co. Dublin, Ireland

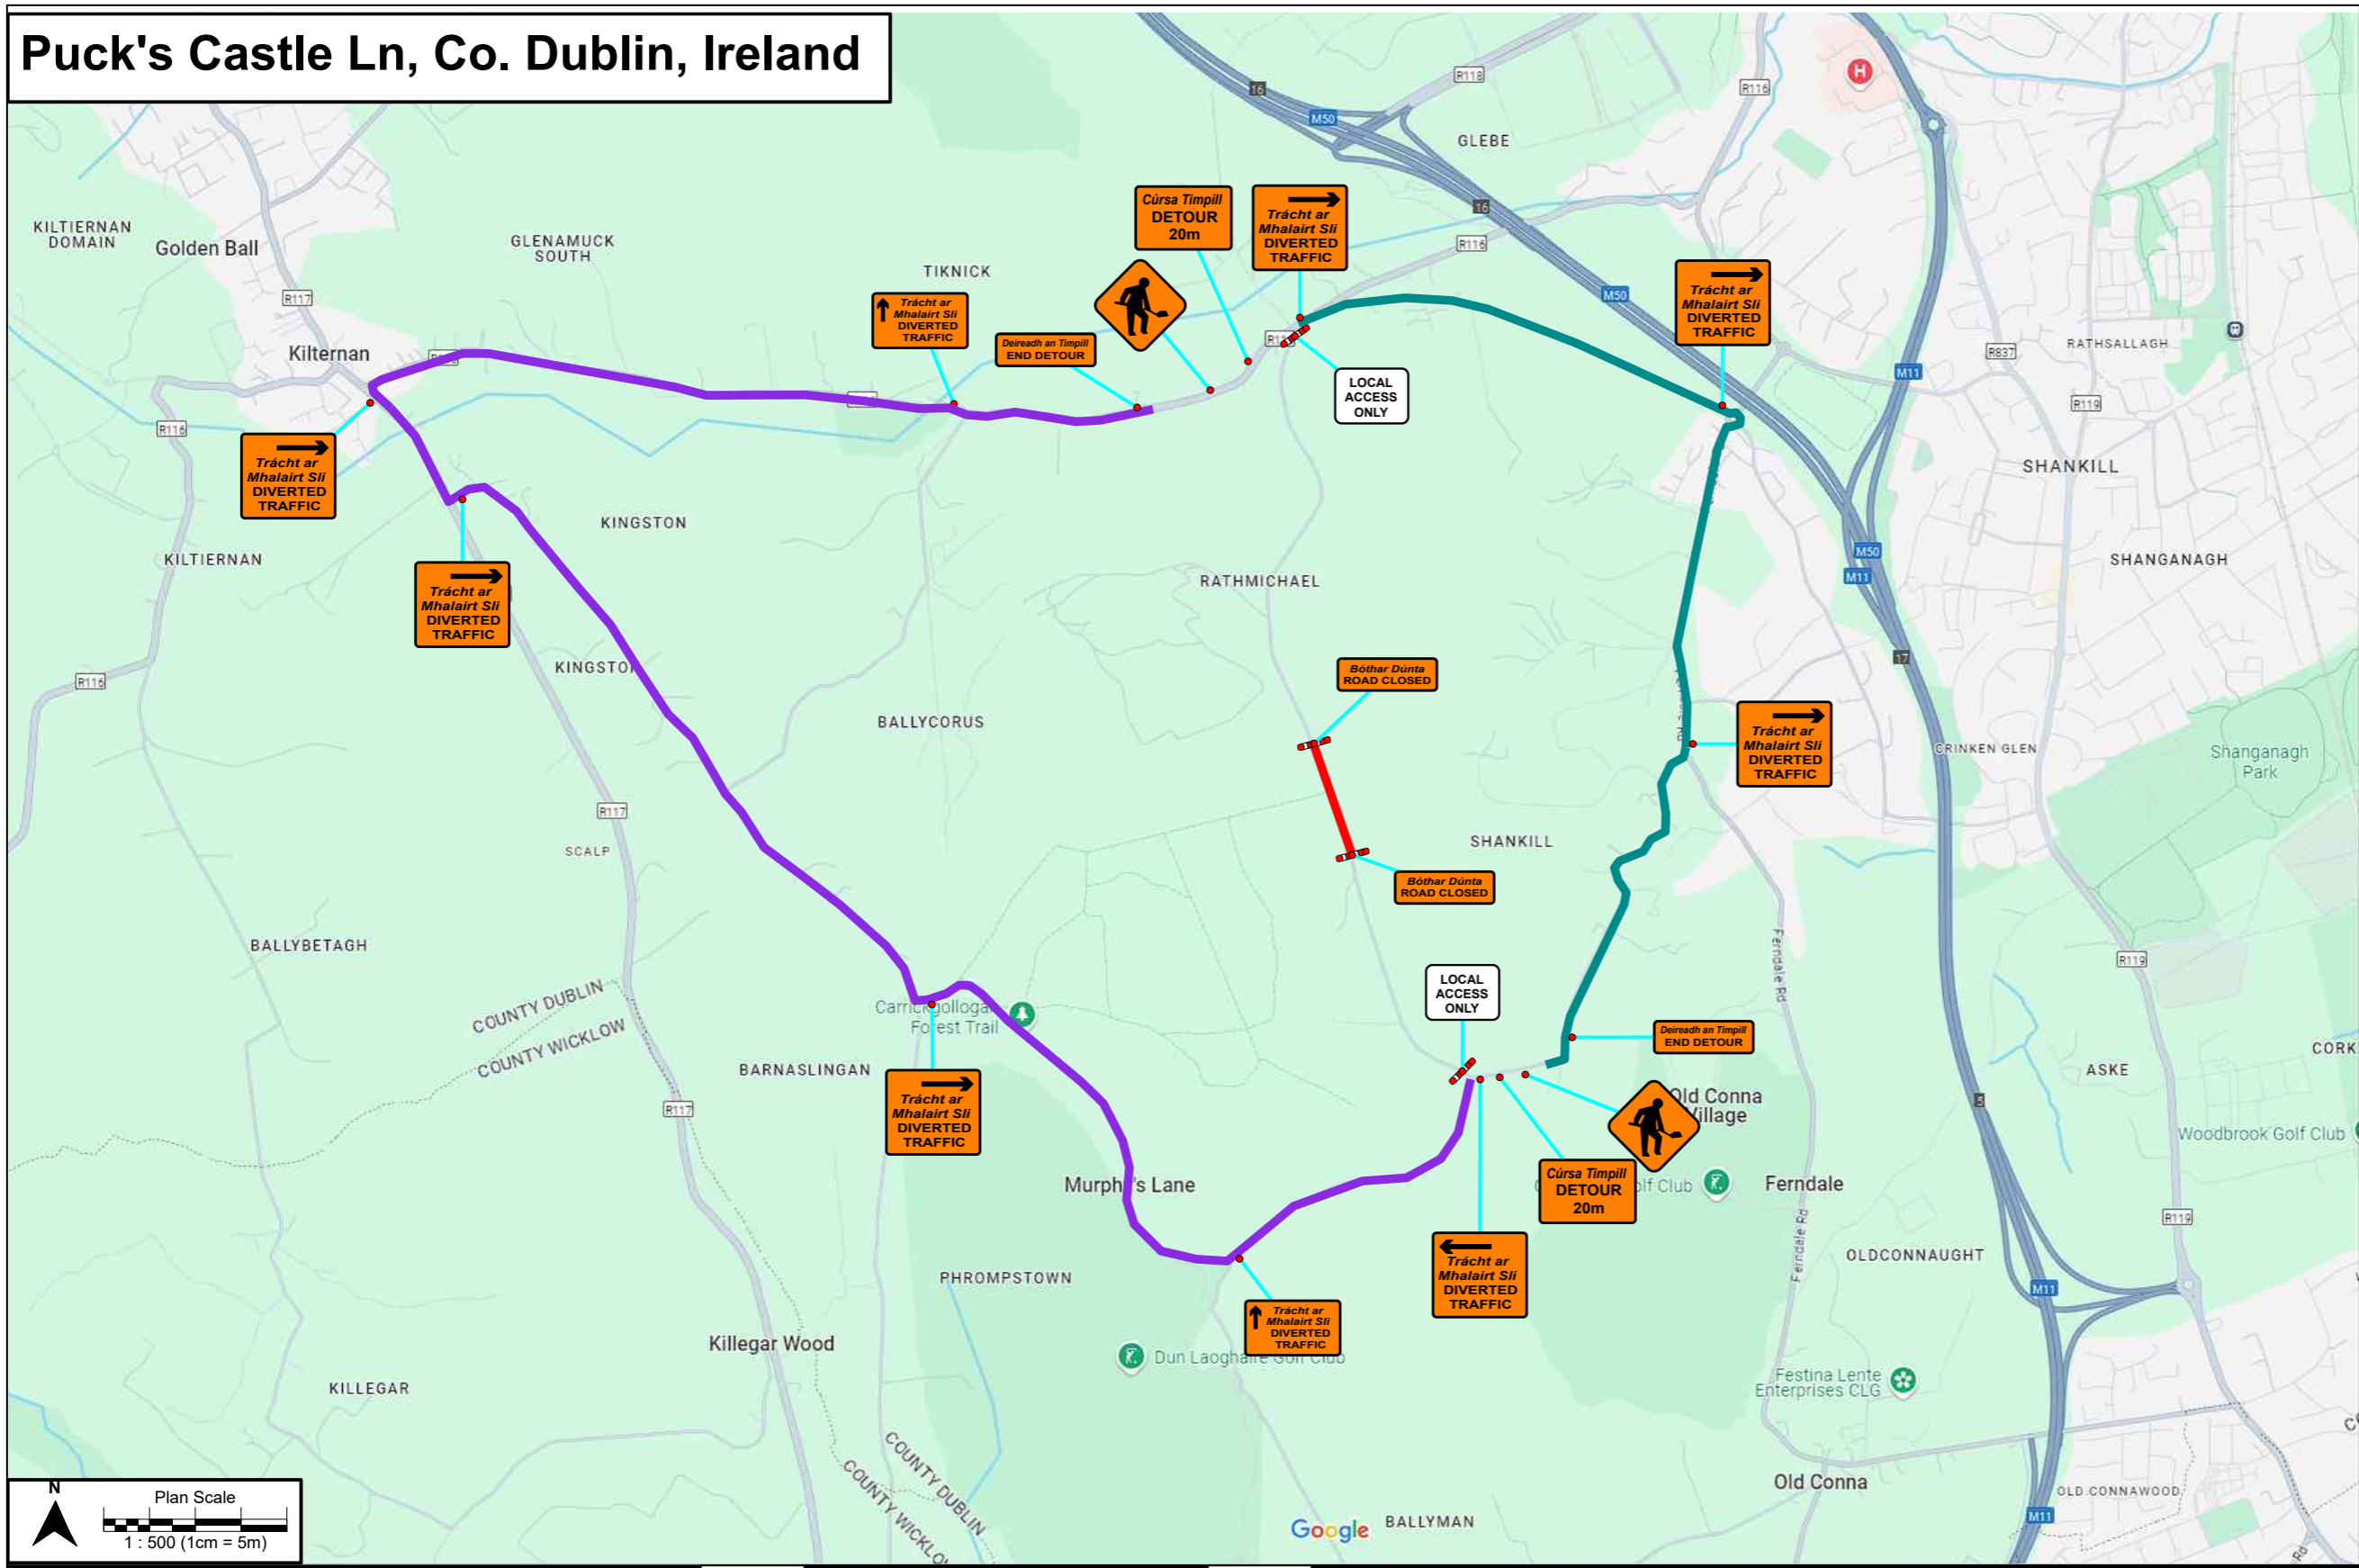

## DESIGN PARAMETERS

ROAD LEVEL:	LEVEL 1(iv)
ROADWORKS TYPE:	TYPE A
SPEED LIMIT:	60 km/h
MAXIMUM TRAFFIC COUNT:	N/A

## TEMPORARY SIGNS

SIGN VISIBILITY:	60M
NUMBER OF SIGNS:	3
ADVANCE SIGN SPACING:	20M
MINIMUM SIGN SIZE:	600mm

## RATE OF TAPER

TAPER AT LANE:	N/A
TAPER AT HARD SHOULDER:	N/A
TRANSITION LENGTH:	N/A

## SAFETY ZONE

LONGITUDINAL:	N/A
LATERAL:	N/A

## MINIMUM CONE SPACING

AT TAPER:	N/A
LONGITUDINAL:	N/A

## LAMP SPACING DURING HOURS OF DARKNESS

AT TAPER:	N/A
LONGITUDINAL:	N/A
MIN LANE WIDTH:	N/A

## DESIGN

METHOD:	DIVERSION
---------	-----------

## Legend

- Barrier
- Pedestrians

Richard Nolan  
civil engineering



Client: SECTO

Project: Puck's Castle Ln, Co. Dublin, Ireland

Title: Diversion

Director: DN Proj. Man: PG Checked: PG

Scale: 1 : 500 Drafted by: EC Date: 06/09/2024

Drawing No: 32514 - TMP 001

REV:	DESCRIPTION:	By:	Check:	Date:
000	INITIAL ISSUE	EC	PG	06/09/2024

- GENERAL NOTES:**
- THIS TRAFFIC MANAGEMENT PLAN MAY ONLY BE IMPLEMENTED BY A TEMPORARY TRAFFIC OPERATIONS SUPERVISOR WHO MUST CARRY OUT A SITE RISK ASSESSMENT TO MODIFY THE MEASURES DESCRIBED TO SUIT ACTUAL SITE CONDITIONS BEFORE IMPLEMENTATION
  - THE TEMPORARY TRAFFIC OPERATIONS SUPERVISOR MUST BE IN POSSESSION OF THE VALID CONSTRUCTION SKILLS REGISTRATION CARD 'SIGNING, LIGHTING, AND GUARDING AT ROADWORKS' CONSTRUCTION REGULATIONS 2006.
  - THIS TRAFFIC MANAGEMENT PLAN HAS BEEN DRAFTED ON A PRELIMINARY BASIS AND DOES NOT TAKE ACCOUNT OF THE SCALES ASSOCIATED WITH THE DIFFERENT PHASES OF THE PROJECT. ARRANGEMENTS FOR MATERIAL DELIVERY, SPOIL REMOVAL, AND TEMPORARY ACCESS HAVE NOT BEEN DEVELOPED INTO THE PLAN AS THEY WERE NOT ADVISED AT THE TIME OF PREPARATION.
  - IN ORDER THAT THE REQUIREMENTS AS SET PER SECTION 1(2) 2005 ACT ARE SATISFIED, FURTHER ALTERATION TO THE PLAN MUST BE ADVISED BY THE PSDP AS PER CONSTRUCTION REGULATIONS 2006 PS 5 REGS 16-17 AND REG 97 (2a & 2b) RESPECTIVELY. IN ADDITION THE PSCS SHOULD FURTHER DIRECT ANY CHANGES AS THE PROJECT PROGRESSES.
  - ALL WORKS ARE TO BE CARRIED OUT IN ACCORDANCE WITH LOCAL AUTHORITY REQUIREMENTS AND TO BE INCLUDED IN THE SITE SPECIFIC SAFETY & HEALTH PLAN.
  - SITE INSPECTIONS AND MAINTENANCE OF THE TRAFFIC MANAGEMENT LAYOUT IS TO BE CONDUCTED ON A DAILY BASIS TO ENSURE THE SAFETY AND INTEGRITY OF THE DESIGN.
  - CONTRACTOR TO CARRY OUT A SITE RISK ASSESSMENT PRIOR TO THE INSTALLATION OF THE TRAFFIC MANAGEMENT PLAN TO ENSURE THAT CONDITIONS REFLECT THOSE CONSIDERED FOR DESIGN POST SUBMISSION.
  - ALL SIGNS USED (AND MANUFACTURED AFTER 01.09.19) MUST CONFORM TO THOSE SPECIFIED IN THE TRAFFIC MANAGEMENT PLAN SO FAR AS THEY ALSO CONFORM TO THE CHAPTER 9 2019. THE SIGNAGE THEREFORE MUST INCORPORATE MICRO PRISMATIC RETROREFLECTIVE SHEETING
  - WK 052



**Section**

**Notes:**